
TELEFUNKEN TRANSISTOR 7281T

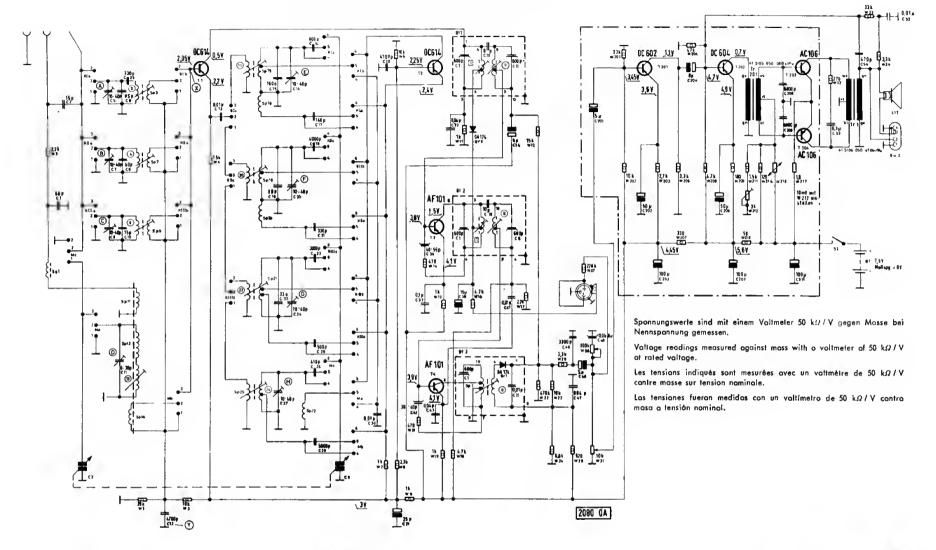

Technicai Data

7.5 volts, or 5 standard 1.5 volts flashlight battery cells cannected in series $\{1^{31/\text{sz}^m}~\phi~\text{by}~2^{11/\text{sz}^n}\}$ **Battery supply:**

Current consumption: opprox, 13.5 milliomps zero current

more than 500 hours intermittent aperation with Operation time:

high-pawer dry battery cells

Transistor complement: OC 614, OC 614, AF 101, AF 101, OC 602, OC 604, AC 106, AC 106

Germanium diades: OA 174, OA 174

Tuned circuits: tatal number 7, including 2 variable capacitor

circuits

Wave bands:

Standord Broadcost MW: 510 to 1630 kc Short Wave 3 2,2 to 5,3 mc Short Wave 2 5,9 to 12,4 mc Shart Wave 1 14,7 to 22 mc

telescapic whip antenno for short waves, built-in Antennae: ferrite rod antenna far standard broadcast band

reception

Intermediate frequency: 460 kc

1 permanent-dynamic speaker, dimensions 3" by $51/8\,^{\prime\prime}$, or $75\times130\,$ mms Loudspeaker:

Cannectians for: extension speaker, record player ar recard

chonger

width 121/4", height 71/4", depth 33/4" Cabinet dimensions:

